

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 7/04</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/67916</b>							
			(43) International Publication Date: 29 December 1999 (29.12.99)							
(21) International Application Number: PCT/SE99/00946		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).								
(22) International Filing Date: 1 June 1999 (01.06.99)										
(30) Priority Data: 09/104,339 25 June 1998 (25.06.98) US										
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).										
(72) Inventor: BERGKVIST, Bengt; Högbyvägen 70, S-175 46 Järfälla (SE).										
(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		Published With international search report.								
(54) Title: METHOD FOR DECORRELATING BACKGROUND INTERFERENCE IN A TIME-SYNCHRONIZED MOBILE COMMUNICATIONS SYSTEM										
<table border="1"><tr><td>TB 3</td><td>Encrypted bits 57</td><td>1</td><td>Training Sequence 26</td><td>1</td><td>Encrypted bits 57</td><td>TB 3</td></tr></table> <p style="text-align: center;">← 148 bits →</p>				TB 3	Encrypted bits 57	1	Training Sequence 26	1	Encrypted bits 57	TB 3
TB 3	Encrypted bits 57	1	Training Sequence 26	1	Encrypted bits 57	TB 3				
(57) Abstract										
<p>A method and system are disclosed for decorrelating background interference signals in a time-synchronized cellular system (10), in which a mobile station (20) inserts a different training sequence in each successive transmitted burst. The constantly varying background interference signal environment that results can be decorrelated at base station (12, 14, 16, 18) receivers, which enhances the reception of multiple independent mobile station transmissions, and thus increases the sensitivity and precision of time-synchronization measurements, such as, for example, time-of-arrival or time-difference-of-arrival measurements made for mobile station positioning purposes.</p>										

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**METHOD FOR DECORRELATING BACKGROUND  
INTERFERENCE IN A TIME-SYNCHRONIZED  
MOBILE COMMUNICATIONS SYSTEM**

5 BACKGROUND OF THE INVENTION

Technical Field of the Invention

The present invention relates in general to the mobile communications field and, in particular, to a method for decorrelating background interference signals in a time-synchronized mobile communications system.

10 Description of Related Art

Synchronization in cellular communications systems is often implemented by the use of a special synchronization burst using known transmitted sequences. Time synchronization is then achieved by comparing the known transmitted sequence with the received sequence by correlation techniques, and using the correlation peak or other properties as a time reference. As such, the precision that can be obtained depends on the bandwidth available, and the noise or interference background against which the useful signal appears.

The precision of the time-synchronization process can be increased if multiple transmissions of the synchronization sequence can be demodulated at the receiver. Otherwise, somewhat degraded background interference conditions may be tolerated for a specified degree of lower precision. However, a prerequisite for obtaining higher receiver gain through the use of multiple measurements is that the measured signals not be identical. This requirement can be met if the synchronization signals appear against a noise or interference background that is decorrelated between adjacent measurements. Better measurements can also be obtained if the properties of the sources creating the interference change between measurements. However, in most practical situations, such source changes do not occur.

30 An important area of interest in the cellular communications field is the area related to time synchronization of bursts in time-division multiple access (TDMA) systems. During an ongoing call in a TDMA system, synchronization can be

-2-

maintained by the use of training sequences included in each of the MS's transmitted bursts. In that regard, in the higher capacity cellular systems, the interference background is created by transmissions from numerous MSs other than the one involved in the call. As such, these MSs transmit bursts with training sequences that are fixed for finite periods. However, call connections often utilize transmissions having a high degree of time stability. Consequently, for a particular desired signal, the same background interference signals can appear and be measured for a plurality of measurement periods, which degrades both timing and synchronization accuracy. In this context, the background interference is referred to as correlated.

A special application of the above-described time synchronization approaches is in the mobile positioning field for TDMA cellular systems. For example, if a MS's transmissions containing synchronization sequences are measured at a plurality of base stations, the time of arrival (TOA) or time difference of arrival (TDOA) of the received signals can be used, along with certain timing information and information about the geographical locations of the base stations, in order to estimate the MS's position.

Essentially, at a common measurement instant, numerous base stations measure the arrival time of a signal received from the MS whose position is to be determined. A central computing function converts the different arrival times of the MS's signal to distances, and calculates the results to determine the position of the MS. The precision in this method is determined primarily by the exactness of the burst arrival time at each base station, with respect to a common time reference. Also, measuring the TOA or TDOA of the MS's transmissions at as many base stations as possible improves the positioning accuracy, especially in strong multipath environments. As such, in order to be able to increase the number of base stations that can be used to make valid TOA or TDOA measurements from a MS's transmissions, it is highly desirable to be able to utilize multiple transmissions and signal combining techniques in order to enhance measurement sensitivity and thus precision. However, a problem with the existing time-synchronization measurement approaches is that they provide no means for generating background signal levels that can enhance performance by combining

-3-

the signals from multiple independent measurements of desired signal sequences. As described in detail below, the present invention successfully resolves this problem and other related problems.

## 5 SUMMARY OF THE INVENTION

In accordance with a preferred embodiment of the present invention, a method is provided for decorrelating background interference in a TDMA cellular system, in which a MS inserts a different training sequence in each successive transmitted burst. The constantly varying background interference signal  
10 environment that results can be decorrelated at the receiver, which enhances the reception of multiple independent MS transmissions, and thus increases the sensitivity and precision of time-synchronization measurements, such as, for example, TOA or TDOA measurements made for MS positioning purposes.

An important technical advantage of the present invention is that it provides  
15 a method for generating background signal levels that can enhance performance by combining the signals from multiple independent measurements of desired signal sequences.

Another important technical advantage of the present invention is that it  
20 provides a method for using multiple transmitted bursts to enhance measurement accuracy in a MS positioning system.

Yet another important technical advantage of the present invention is that it  
provides a method for increasing the sensitivity and precision of time-  
synchronization measurements, such as, for example, TOA or TDOA  
measurements made for MS positioning purposes.

25 Still another important technical advantage of the present invention is that it provides a method for decorrelating background interference in a time-synchronized mobile communications system.

## BRIEF DESCRIPTION OF THE DRAWINGS

30 A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

-4-

FIGURE 1 is a simplified block diagram that shows a plurality of radio base stations and a MS in an exemplary time-synchronized cellular network, which can be used to implement a preferred embodiment of the present invention;

FIGURE 2 is an example of a "normal" burst that can be used to implement the present invention; and

FIGURE 3 is a diagram that shows a plurality of bit sequences that can be used to implement the present invention.

#### DETAILED DESCRIPTION OF THE DRAWINGS

The preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-3 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

Essentially, a method is provided for decorrelating background interference in a TDMA cellular system, in which a MS inserts a different training sequence in each successive transmitted burst. The varying background interference signal environment that results can be decorrelated at the receiver, which enhances the reception of multiple independent MS transmissions, and thus increases the sensitivity and precision of time-synchronization measurements, such as, for example, TOA or TDOA measurements made for MS positioning purposes.

Specifically, FIGURE 1 is a simplified block diagram that shows a plurality of radio base stations (RBSs) 12, 14, 16, 18, and a MS 20 in an exemplary time-synchronized cellular network 10, which can be used to implement a preferred embodiment of the present invention. The cellular network 10 is described herein as a Global System for Mobile Communications (GSM) network for illustrative purposes only. However, the present invention can be implemented as well in any type of time-synchronized (e.g., TDMA) system that uses training sequences or sequences of bits in an MS's transmitted bursts, which are known to the network base station's receiver and enable the receiver to estimate or model a channel to which the receiver can adapt.

Preferably, the MS 20 transmits respective "normal" bursts on a traffic channel (TCH in the GSM) over a radio air interface to the network RBS's 12, 14, 16, 18. In the GSM, a "normal" burst is used to carry information (data or speech) on the TCH and certain control channels. In this embodiment, the TOA or TDOA measurements

used for determining the position of a MS are based on the base stations' receipt of a "normal" burst from the MS on the respective TCHs. An example of such a "normal" burst is shown in FIGURE 2.

5 In the GSM, a "normal" burst transmitted by an MS includes two 1-bit sets of Tail Bits (TBs), two 57-bit sets of encrypted data or speech, two 1-bit "stealing flags", and one 26-bit training sequence. The TBs are each composed of "000", which provide the equalizer algorithms in the RBS receivers with a known starting/stopping point. The 1-bit "stealing flags" indicate whether or not the burst has been "stolen" for Fast Associated Control Channel (FACCH) signalling purposes.

10 Notably, for time-synchronized or TDMA cellular systems other than the GSM, the format and arrangement of the bit sequences in the MS burst used for measurements can be different than, or the same as, the conventional "normal" burst transmitted by MSs in the GSM. As such, the important aspect of the present invention is that a known training sequence or similar known bit sequence is utilized  
15 in a MS's transmitted bursts, in a way that can be used by the base station receivers to decorrelate and combine the multiple background interference signals. In accordance with the present invention, the training sequences transmitted by a MS for measurement purposes (e.g., positioning measurements) are changed in each successive burst, which results in a constantly varying background interference signal  
20 environment (i.e., decorrelated).

For example, FIGURE 3 is a diagram that shows an exemplary plurality of bit sequences (e.g., training sequences) that can be used to implement the present invention. As shown, in accordance with the aspect of primary importance for the present invention, each bit sequence (e.g., transmitted in a MS's "normal" burst on a  
25 GSM TCH) is different than the previous one. In this embodiment, the MS 20 generates the bit sequences shown and transmits each one in a "normal" burst preferably for the duration of a special application, such as, for example, MS positioning measurements to be made by at least three of the RBSs 12, 14, 16, 18. At the conclusion of the special (e.g., measurement) period, the MS 20 can resume the  
30 transmission of bursts with conventional bit sequences (i.e., transmitting the same training sequence for a finite duration). In this way, the useful signal from the MS of interest (20) is more variable in comparison with the background interference, which

facilitates decorrelation of the background interference signals at the RBSs 12, 14, 16, 18.

Alternatively, the MS 20 can randomly select each bit sequence from the plurality of available bit sequences, and transmit each burst with the randomly selected bit sequence. In this way, the useful signal from the MS of interest is more variable in comparison with the background interference on a continuous basis, and the general background interference environment is randomized.

In a second embodiment of the present invention, the use of a constantly varying bit sequence known to the base station receiver in a MS's burst transmissions can improve the likelihood of signal enhancement by combining the multiple received signals used for time-synchronized measurements, if a bit sequence different from that for a "normal" burst is used. For example, in this embodiment, a training sequence used in a random access burst can be transmitted by the MS and used for positioning measurements. In the GSM, an "access" burst includes a 41-bit training sequence (longer than in a "normal" burst, in order to increase the probability of demodulation), 36 bits of information, and 7 and 3 TBs, respectively, at the leading and lagging ends. In this embodiment, the MS 20 can transmit a series of such "access" bursts, in which each training sequence is different than the previous one. This approach can be valid, for example, for MS positioning measurements that appear against the background interference environment for "normal" burst transmission channels.

As a complement to the present invention and method, the variability of the interference background can be further increased by the use of slow frequency hopping, which can be implemented, for example, in the GSM. With this approach, the MS of interest changes frequency between successive bursts, in addition to changing the training sequences. By using different frequency changing programs in different MSs, a highly variable signal environment can be created, which can further increase the decorrelation of the environment.

Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as



-7-

set forth and defined by the following claims.

-8-

## WHAT IS CLAIMED IS:

1. A method for facilitating decorrelation of background interference signals in a base station receiver of a time-synchronized mobile communications system, comprising the steps of:
  - 5 a mobile station generating a plurality of bursts, each burst of said plurality of bursts including an associated bit sequence known to said base station receiver; and
  - said mobile station transmitting said plurality of bursts, wherein each successive associated bit sequence is different.
- 10 2. The method of Claim 1, wherein said time-synchronized mobile communications system comprises a TDMA cellular system.
3. The method of Claim 1, wherein said time-synchronized mobile communications system comprises a GSM.
- 15 4. The method of Claim 1, wherein said time-synchronized mobile communications system comprises a Digital-Advanced Mobile Phone System.
5. The method of Claim 1, wherein said time-synchronized mobile communications system comprises a Personal Digital Cellular System.
- 20 6. The method of Claim 1, wherein said time-synchronized mobile communications system comprises a Personal Communications System.
- 25 7. The method of Claim 1, wherein said time-synchronized mobile communications system comprises a cellular communications system.
8. The method of Claim 1, wherein each said associated bit sequence is randomly selected.
- 30 9. The method of Claim 1, further comprising the step of slow frequency hopping said plurality of bursts.

-9-

10. The method of Claim 1, further comprising the steps of:  
said base station receiver measuring an arrival time for each of said plurality  
of bursts; and  
estimating a geographical position of said mobile station from at least said  
measured arrival time.

11. A system for facilitating decorrelation of background interference  
signals in a base station receiver of a time-synchronized mobile communications  
system, comprising:

a mobile station, said mobile station including:  
means for generating a plurality of bursts, such that each burst of said plurality  
of bursts includes an associated bit sequence known to said base station receiver; and  
means for transmitting said plurality of bursts, coupled to said means for  
generating, such that each successive associated bit sequence is different.

12. The system of Claim 11, wherein said time-synchronized mobile  
communications system comprises a TDMA cellular system.

13. The system of Claim 11, wherein said time-synchronized mobile  
communications system comprises a GSM.

14. The system of Claim 11, wherein said time-synchronized mobile  
communications system comprises a Digital-Advanced Mobile Phone System.

15. The system of Claim 11, wherein said time-synchronized mobile  
communications system comprises a Personal Digital Cellular System.

16. The system of Claim 11, wherein said time-synchronized mobile  
communications system comprises a Personal Communications System.

17. The system of Claim 11, wherein said time-synchronized mobile  
communications system comprises a cellular communications system.

-10-

18. The system of Claim 11, wherein said mobile station randomly selects each said associated bit sequence.

5 19. The system of Claim 11, wherein a transmission of said plurality of bursts is slow frequency hopped.

10 20. The system of Claim 11, wherein said base station receiver comprises:  
means for measuring an arrival time for each of said plurality of bursts; and  
means, coupled to said means for measuring, for estimating a geographical  
position of said mobile station from at least said measured arrival time.

1 / 1

FIG. 1

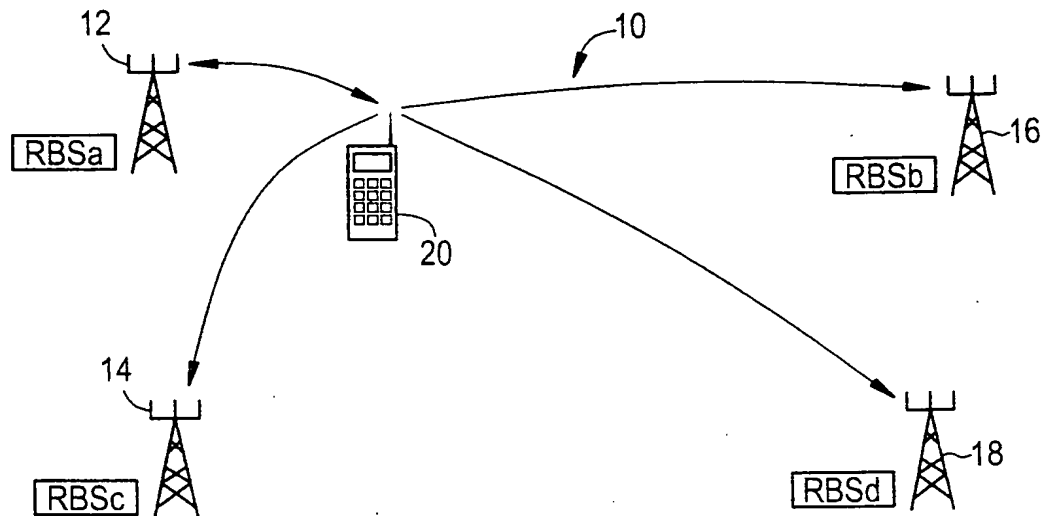


FIG. 2

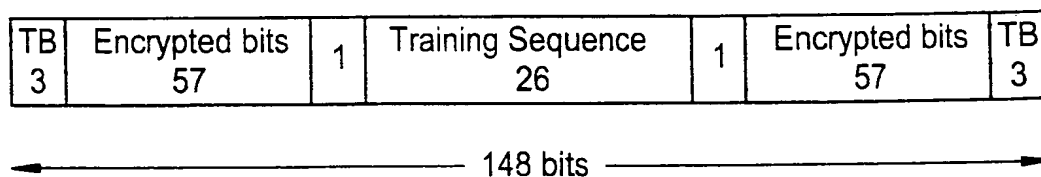


FIG. 3

```

1 1 1 0 1 1 1 1 0 0 0 1 0 0 1 0 1 1 1 0 1 1 1 1 0 0 ;
0 0 1 0 1 1 0 1 1 1 0 1 1 1 1 0 0 0 1 0 1 1 0 1 1 1 ;
0 0 0 1 1 0 1 0 1 1 1 0 0 1 0 0 0 0 0 1 1 0 1 0 1 1 ;
1 0 1 0 0 1 1 1 1 1 0 1 1 0 0 0 1 0 1 0 0 1 1 1 1 1 ;
0 0 1 0 0 1 0 1 1 1 0 0 0 0 1 0 0 0 1 0 0 1 0 1 1 1 ;
0 1 0 0 1 1 1 0 1 0 1 1 0 0 0 0 0 1 0 0 1 1 1 0 1 0 ;
0 1 0 0 0 1 1 1 1 0 1 1 0 1 0 0 0 1 0 0 0 1 1 1 1 0 ;
0 1 0 0 0 0 1 1 1 0 1 1 1 0 1 0 0 1 0 0 0 0 1 1 1 0 ;

```

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/SE 99/00946

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04L7/04

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04L H04B H04J H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 767 557 A (NOKIA MOBILE PHONES LTD) 9 April 1997 (1997-04-09) page 2, line 3-10 page 2, line 19-29 page 3, line 15-20 page 3, line 49 - page 4, line 8	1-7, 10-17, 20
X	WO 96 11533 A (NOKIA TELECOMMUNICATIONS OY ; NOKIA MOBILE PHONES LTD (FI); HOTTINE) 18 April 1996 (1996-04-18) page 1, line 3-10 page 5, line 18 - page 6, line 6 page 10, line 14-34 --- -/-	1-7, 11-17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

27 August 1999

Date of mailing of the international search report

06/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Traverso, A

# INTERNATIONAL SEARCH REPORT

Inter national Application No  
PCT/SE 99/00946

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 548 583 A (BUSTAMANTE HERMAN A) 20 August 1996 (1996-08-20) column 1, line 19-25 column 2, line 54-65 column 3, line 10-24 column 7, line 24-39 column 11, line 54 - column 12, line 6 -----	10, 20
A	US 5 590 133 A (BILLSTROEM LARS ET AL) 31 December 1996 (1996-12-31) column 1, line 6-12 column 1, line 58 - column 2, line 3 -----	2-7, 12-17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/00946

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0767557	A	09-04-1997	FI 954704 A US 5838672 A	04-04-1997 17-11-1998
WO 9611533	A	18-04-1996	FI 944736 A AU 697708 B AU 3654795 A EP 0784887 A JP 10507598 T NO 971545 A	08-04-1996 15-10-1998 02-05-1996 23-07-1997 21-07-1998 04-06-1997
US 5548583	A	20-08-1996	US 5570349 A US 5375140 A US 5687166 A US 5734639 A AU 673042 B AU 5672794 A CA 2150113 A EP 0746932 A JP 8506223 T WO 9413085 A	29-10-1996 20-12-1994 11-11-1997 31-03-1998 24-10-1996 22-06-1994 09-06-1994 11-12-1996 02-07-1996 09-06-1994
US 5590133	A	31-12-1996	AU 675898 B AU 1251595 A CA 2153871 A CN 1117335 A EP 0683963 A FI 953775 A JP 8506713 T WO 9516330 A SG 43755 A	20-02-1997 27-06-1995 15-06-1995 21-02-1996 29-11-1995 09-08-1995 16-07-1996 15-06-1995 14-11-1997



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**BLANK PAGE**